


# MD18

The MD18 extends the frequency response of any loudspeaker system and is appropriate for both music and special-effects applications. The MD18 contains two 1000 watt 18-inch woofers to produce a high-SPL output down to nominally 30Hz. While capable of "earth-shaking" performance, the sonic character has been optimized to be musically pleasing. Designed for ease of use and maneuverability, handles on the top and tilt-back wheels on the bottom allow for fast load-in and load-out. The MD18 is available with optional cast-aluminum pole cups, allowing it to serve as a base for pole-mounted loudspeakers.

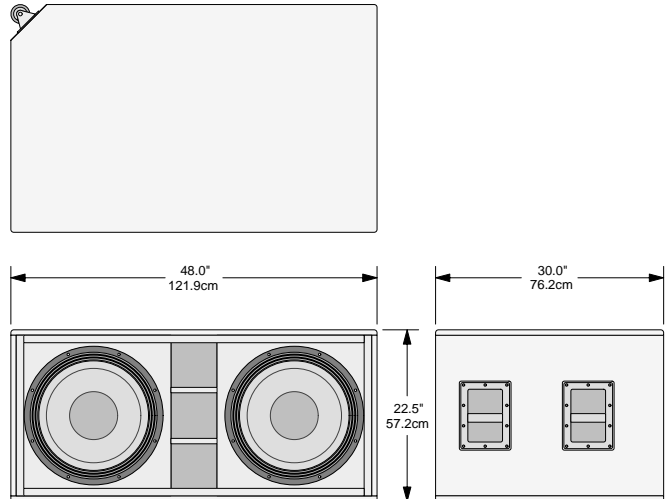

- Features**
- 1000 watt transducers with 4-inch voice coils
  - Carbon fiber reinforced cones
  - Portable and easy to set up
  - High output in low-frequency range

## Specifications

### Standard Configuration

MD18

### Frequency Response

±4dB 30Hz to 140Hz

### Nominal Impedance

4 ohms

### Sensitivity

101dB; one watt, one meter

### Maximum SPL

131dB

### Recommended Amplifier Power

1200 to 2000 watts RMS into 4 ohms

### Recommended Crossover Points

20Hz to 30Hz high pass, 60Hz to 140Hz low pass (depending on application)

### Connectors

Two, Neutrik NL4

### Pole Mounting Support

Optional cast-aluminum mounting cups, accepts 1.5-inch diameter pole

### Enclosure

Hardwood plywood, carpet or textured-paint finish, flush-mounted steel handles, powder-coated perforated steel grill with open-cell foam backing

### Dimensions

22.5 inches high (57.2cm)

48.0 inches wide (121.9cm)

30.0 inches deep (76.2cm)

### Weight

190.0 pounds (86.4kg)

### Options

CCM Control Card for Crown P.I.P.<sup>®</sup>-compatible amplifiers

### Warranty

Three years from date of original purchase

Contents subject to change without notice. Dimensions provided for general reference only.