


### CCB-1 Interface



The CCB-1 interfaces a single RTS Audiocom balanced intercom channel to a single Clear-Com unbalanced intercom channel, with full audio and light signaling compatibility between the two (2) intercom channels. The CCB-1 has no controls and is completely transparent to intercom system operation.

### Line Drawings

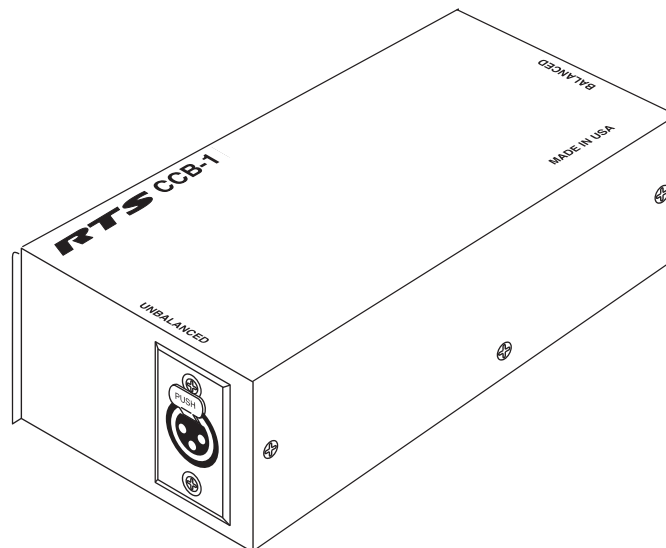

# Specifications

## Current Requirements (with 24 VDC supply)

Quiescent: ..... 15mA nominal  
Signalling: ..... 30mA nominal

## Connectors

Clear-Com Input: ..... 3-pin female XLR  
Telex Audiocom Input: ..... 3-pin male XLR

**Dimensions** ..... 1.75" (45 mm) high,  
2.75" (70 mm) wide,  
5.35" (136 mm) deep

**Construction** ..... Aluminum chassis and cover, finished in non-glaring back

# Order Information

- CCB-1 • Interface

For ordering information, contact your regional sales representative at:  
<http://rtsintercoms.com/us/intercom/contact>

The specification information is preliminary and is subject to change without notification.  
Brand names mentioned are the property of their respective companies.